INDOOR

interior

ALCANTARA®

4083 GRAYSH

2627 CAMEO BROWN

8907 CHIANTI

1096 BLOOM

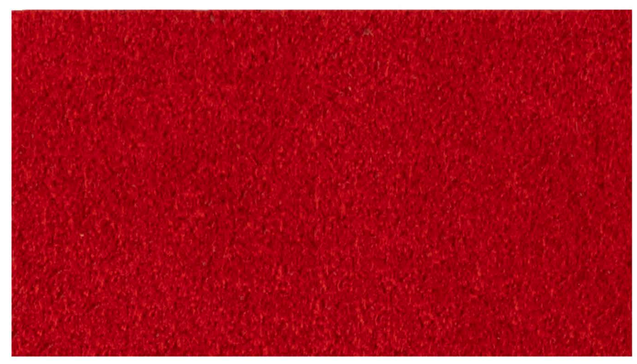

3096 GOYA RED

8801 POMPEIAN RED

4084 PALM

4131 ORANGE

3335 AMARETTO

4180 TAUPE

4025 CADMIUM

7569 AUBERGINE

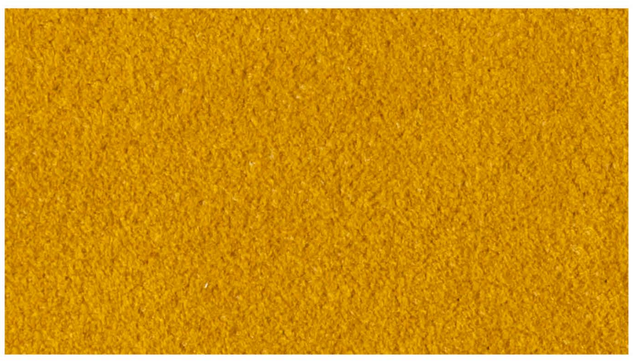

1016 CURRY

4077 DARK CAMEL

7574 BORDEAUX

1234 ANDY

1605 SADDLE

5141 STRING

3051 CAMEL

4061 PRALINE

7801 BROWN

4175 PORCELAIN

6408 INFANTA

6503 COMMODORE

2129 AUBUSSON

3490 BABY GREY

7941 NAVY

2156 CELADON

6801 NILE

7586 BOHEMIAN

1400 STONE

7912 BRITTANY

6601 VIOLET

3470 VELVET

6440 POWDER

6406 SEA

2536 LUNARGLIDE

6404 CHIC

7520 METEORITE

1105 NEVE

1042 ICE

3003 KOALA

1001 EGGSHELL

1150 IVORY

1100 SEA SAND

1267 SILICA

1254 DUNE

1110 AMBER GLOW

1112 DOVE

1070 CORN

4900 TERRA

7290 MUSCATTE

7490 CHESTNUT

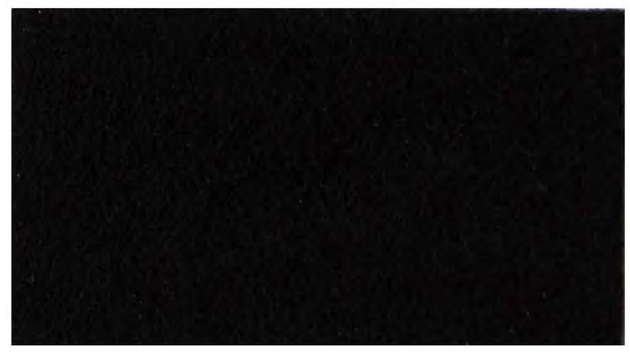

9990 NOTTE

6422 ANTHRACITE

7010 ULTRA UMBER

9901 SLATE BLACK

4078 PEARL

3410 SILVER

3801 WHALE

5810 STEEL

9165 MONKFISH

6407 KIWI

5700 LIZARD

6405 LICHEN

7711 MALACHITE

4129 EMERALD

6501 TREKKING

2161 ALMOND

1153 GOLD

P100 DENIM

P110 AVIO

P010 CONCRETE

P000 FLEECE

P200 FLAX

P210 MOCHA

Alcantara® Avant EVO*lution* **Cod. 5466**

Application Upholstery Aviation / Contract / Marine

MAIN CHARACTERISTICS			
COMPOSITION	ALCANTARA®	Polyester	68 ± 3 %
		Polyurethane	32 ± 3 %
	Backing	Cot/Kanecaron®	45/55 %
FR TREATED	YES		
THICKNESS			≥ 0.95 mm
UNIT WEIGHT		EN 29073-1	≥ 435 g/m2
FLAME RESISTANCE		BS 5852 Crib 5 IMO RES A652 FAR/JAR 25.853	Complies
GENERAL WASHING	30°		

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
95.0.5244 HOHENSTEIN HTTI
Tested for harmful substances.
www.oeko-tex.com/standard100

Alcantara® Multilayer EVO*lution* **Cod. 5170**

Application Upholstery

MAIN CHARACTERISTICS			
COMPOSITION	ALCANTARA®	Polyester	71 ± 3 %
		Polyurethane	29 ± 3 %
THICKNESS			1.2 ± 0.2 mm
UNIT WEIGHT		UNI EN 29073-1	390 ± 60 g/m2
FLAMMABILITY	California Technical Bulletin 117:2013 Section 1		Complies
GENERAL WASHING	30°		

Alcantara® "**EVO***lution*" versions (available upon request) are produced with partially bio-based polyester.
Alcantara® Multilayer "**EVO***lution*" also contains recycled polyester (the recycled content certification is in progress).

Alcantara® has been Carbon Neutral since 2009.

ISO 50001
BUREAU VERITAS
Certification

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
94.0.7851 HOHENSTEIN HTTI
Tested for harmful substances.
www.oeko-tex.com/standard100

Alcantara® Master EVO*lution* — Cod. 5015

Application: Wall covering, Interior decorations

MAIN CHARACTERISTICS

COMPOSITION	ALCANTARA®	Polyester	68 ± 3 %
		Polyurethane	32 ± 3 %
THICKNESS			0.83 ± 0.1 mm
UNIT WEIGHT		UNI EN 29073-1	230 ± 30 g/m2
GENERAL WASHING	30°	P	

Alcantara® Master FR EVO*lution* — Cod. 5763

Application: Contract wall covering

MAIN CHARACTERISTICS

COMPOSITION	ALCANTARA®	Polyester	68 ± 3 %
		Polyurethane	32 ± 3 %
FR TREATED	YES		
THICKNESS			0.83 ± 0.1 mm
UNIT WEIGHT		UNI EN 29073-1	320 ± 45 g/m2
FLAME RESISTANCE	Wall Covering	EN 15102:2007 + A1:2011	CE Marking
	Euroclass	EN 13501-1: 2009	B-s2, d0
GENERAL WASHING	30°	P	

Alcantara® Bord FR EVO*lution* — Cod. 5056

Application: Marine wall covering

MAIN CHARACTERISTICS

COMPOSITION	ALCANTARA®	Polyester	70 ± 3 %
		Polyurethane	30 ± 3 %
FR TREATED	YES		
THICKNESS			0.4 ± 0.05 mm
UNIT WEIGHT		UNI EN 29073-1	150 ± 50 g/m2
FLAME RESISTANCE		IMO RES A653 (ISO 5658)	Complies
		Calorific value (ISO 1716)	≤ 44.9 MJ/m2
		Smoke Density (ISO 5659/2)	≤ 200
GENERAL WASHING	30°	P	